

THE MOBILE RANGE

HUMIDITY
SOLUTIONS
Independently better

COTES
THE RIGHT WAY TO DRY


DATASHEET

THE MOBILE RANGE - SMALL, LIGHT AND ROBUST


Lift it, push it, turn it or swing it around, this selection of compact, lightweight dehumidifiers is built for mobility.

TECHNICAL DATA


CR80B

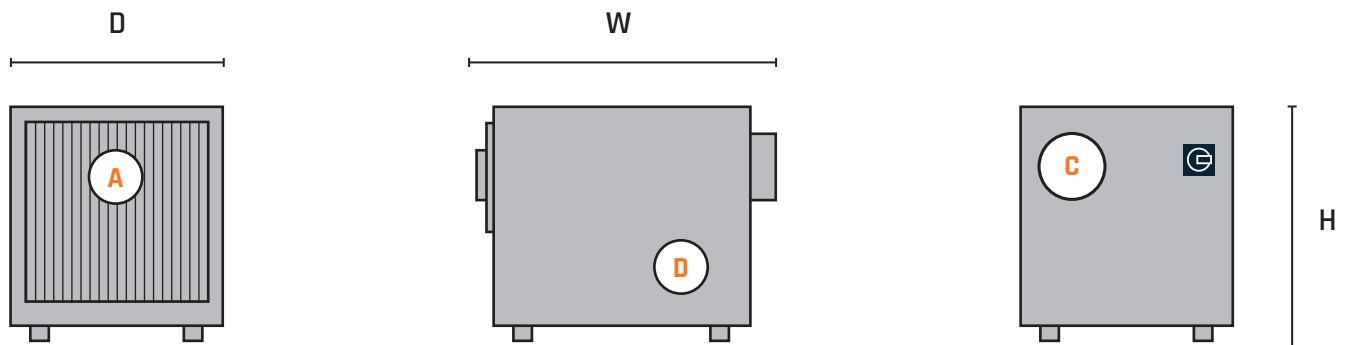

CR240B / CR290B

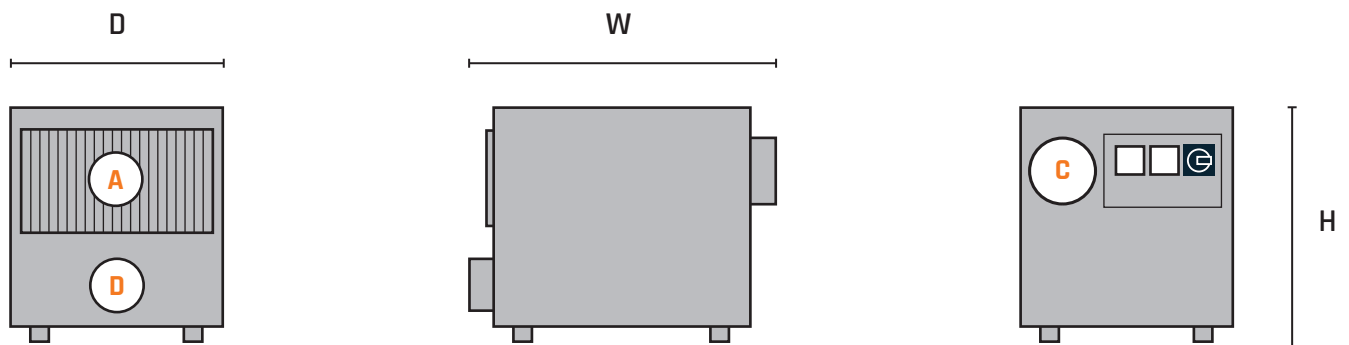

CR400B

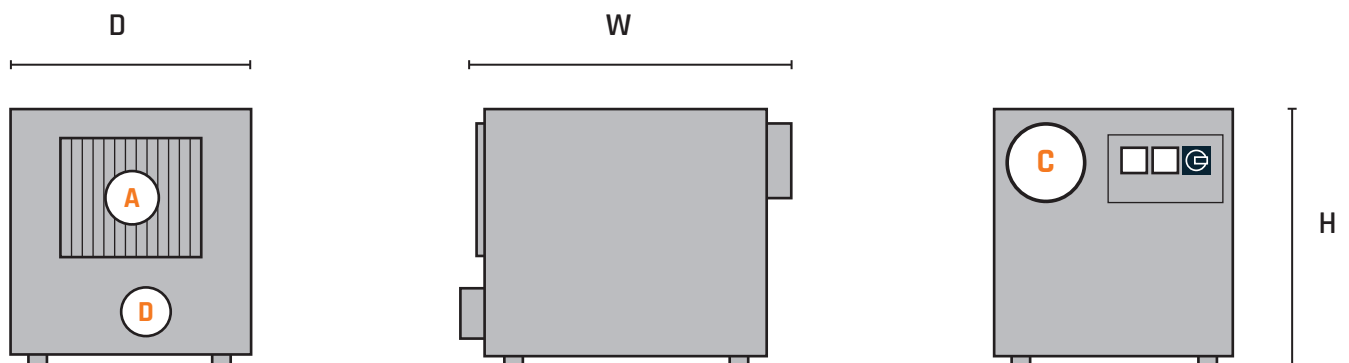

THE MOBILE RANGE

TECHNICAL DATA

THE MOBILE RANGE					
		CR80B	CR240B	CR290B	CR400B

TECHNICAL DATA

DRY AIR NOMINAL	m ³ /h	80	240	290	400
REGENERATION AIR NOMINAL	m ³ /h	40	40	65	90
SUPPLY/PHASES	V/Ph	1 x 230 / PE	1 x 230 / PE	1 x 230 / PE	1 x 230 / PE
CONNECTED LOAD	kW	0.83	1.05	1.63	1.97
REGENERATION AIR HEATER	kW	0.77	0.94	1.4	1.84
EXTERNAL FUSES	A	10	10	10	10
EXT. PRESSURE PROCESS AIR	Pa	50	50	30	50
EXT. PRESSURE REGENERATION AIR	Pa	60	50	50	50
MOISTURE REMOVAL CAPACITY	kg/h	0.44	0.8	1.1	1.4

DIMENSIONS AND WEIGHT

W	WIDTH	mm	313	335	335	410
D	DEPTH	mm	385	400	400	470
H	HEIGHT	mm	293	335	335	405
	WEIGHT (ELECTRICAL)	kg	15	18	19	28

DUCT CONNECTIONS

A	PROCESS AIR INLET	mm	231 x 257	160 x 290	160 x 290	210 x 350
C	PROCESS AIR OUTLET	mm	Ø80	Ø100	Ø100	Ø125
D	REGENERATION AIR OUTLET	mm	Ø50	Ø80	Ø80	Ø80